


# MEGAPIX FLEX

Configurable Multi-Sensor IP cameras

**DWC-PVX20WATW**: MEGApix® IVA™ preloaded

**DWC-PPVX20WATW**: MEGApix® IVA™ preloaded

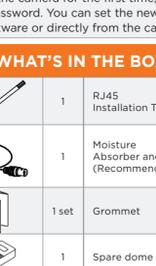

### Default login information: admin | admin

When logging into the camera for the first time, you will be prompted to set up a new password. You can set the new password using the DW® IP Finder™ software or directly from the camera's browser menu.

## WHAT'S IN THE BOX

Star Wrench (T-20)		1	RJ45 Installation Tool		1
Test Monitor Cable		1	Moisture Absorber and Installation Guide (Recommended)		1
Quick Setup and Download Guides		1 set	Grommet		1
PoE Injector		1	Spare dome screws		Set of 7

### ACCESSORIES REQUIRED TO INSTALL THE CAMERA (SOLD SEPARATELY)


Wall mount bracket: DWC-PV20WMW	Ceiling mount bracket: DWC-PV20CMW	Flush mount: DWC-PV20FMW	Junction box: DWC-PV20JUNCW
---------------------------------	------------------------------------	--------------------------	-----------------------------

Parapet bracket and tilting adapter (each sold separately): DWC-PZPARAM, DWC-PV20ADPW

**NOTE:** Mounting accessories are required and sold separately.

**NOTE:** Download all your support materials and tools in one place

- Go to: <http://www.digital-watchdog.com/resources>
- Search your product by entering the part number in the "Search by Product" search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
- Click "Search". All supported materials, including manuals and quick start guide (QSGs) will appear in the results.



**Attention:** This document is intended to serve as a quick reference for the initial set-up. It is recommended that the user read the entire instruction manual for complete and proper installation and usage.

## SAFETY AND WARNING INFORMATION

Read through this Installation Guide carefully before installing the product. Keep the Installation Guide for future reference. See the user manual for more information on the proper installation, use and care of the product. These instructions are intended to ensure that users can use the product correctly to avoid danger or property loss. Warnings: Serious injury or death may occur if any of the warnings are neglected. Cautions: Injury or equipment damage may occur if any of the cautions are neglected.

**WARNING:** In the use of the product, you must be strict compliance with the electrical safety regulations of the nation and region. When the product is mounted on a wall or ceiling, the device shall be firmly fixed.

- Be sure to use only the standard adapter specified in the specification sheet. Using any other adapter could cause fire, electrical shock, or damage to the product.
- Make sure the power supply voltage is correct before using the camera.
- Incorrectly connecting the power supply or replacing the battery may cause an explosion, fire, electric shock, or damage to the product.
- Do not connect multiple cameras to a single adapter. Exceeding the capacity may cause excessive heat generation or fire.
- Securely plug the power cord into the power source. An insecure connection may cause a fire.
- When installing the camera, fasten it securely and firmly. A falling camera may cause personal injury.
- Do not install in a location subject to elevated temperature, low temperature, or high humidity. Doing so may cause fire or electric shock.
- Do not place conductive objects (e.g. screwdrivers, coins, metal items, etc.) or containers filled with water on top of the camera. Doing so may cause personal injury due to fire, electric shock, or falling objects.
- Do not install in humid, dusty, or sooty locations. Doing so may cause fire or electric shock.
- Do not install near any heat sources such as radiators, heat registers, or other products (including appliances) that produce heat.
- A polarized or grounding-type plug is recommended for this product. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. If the provided plug does not fit into your outlet, consult an electrician for replacement.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the product.
- If any laser equipment is used near the product, make sure the surface of the sensor is not exposed to the laser beam as that may damage the sensor module.
- If you want to move the already installed product, be sure to turn off the power and then move or reinstall it.
- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or the user.
- If cleaning is necessary, please use a clean cloth to wipe it gently. If the device will not be used for a long time, please cover the lens cap to protect the device from dirt.
- Do not touch the camera's lens or sensor module with fingers. If cleaning is necessary, please use a clean cloth to wipe it gently. If the device will not be used for a long time, please cover the lens cap to protect the device from dirt.

**CAUTION:** Do not use this product near water.

- Use proper safety gear when installing and wiring the product.
- Do not drop objects on the product or apply strong shock to it. Keep away from a location subject to excessive vibration or magnetic interference.
- Do not use this product near water.
- The product shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the product.
- Avoid aiming the camera directly towards extremely bright objects such as the sun, as this may damage the image sensor.
- The Main plug is used as a disconnect device and shall stay readily operable at all times.
- Remove the power adapter from the outlet when there is lightning. Neglecting to do so may cause fire or damage to the product.
- Do not block any ventilation openings. Install following the manufacturer's instructions.
- A polarized or grounding-type plug is recommended for this product. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. If the provided plug does not fit into your outlet, consult an electrician for replacement.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the product.
- If any laser equipment is used near the product, make sure the surface of the sensor is not exposed to the laser beam as that may damage the sensor module.
- If you want to move the already installed product, be sure to turn off the power and then move or reinstall it.
- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or the user.
- If cleaning is necessary, please use a clean cloth to wipe it gently. If the device will not be used for a long time, please cover the lens cap to protect the device from dirt.
- Do not touch the camera's lens or sensor module with fingers. If cleaning is necessary, please use a clean cloth to wipe it gently. If the device will not be used for a long time, please cover the lens cap to protect the device from dirt.


**NOTE:** Use only attachments/accessories specified by the manufacturer.

- Always use hardware (e.g. screws, anchors, bolts, locking nuts, etc.) compatible with the mounting surface and of sufficient length and construction to ensure a secure mount.
- Use only with cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the product.
- Unplug this product when a cart is used. Use caution when moving the cart/product combination to avoid injury.
- Refer all servicing to qualified service personnel. Servicing is needed when the product has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the product, the product has been exposed to rain or moisture, does not operate normally, or has been dropped.


## STEP 1 – PREPARING TO MOUNT THE CAMERA

- The mounting surface must bear five times the weight of your camera.
- Avoid allowing cables to become pinched or abraded during installation. If the plastic wire jacket of the electrical line is damaged, it could result in an electrical short or fire.
- CAUTION:** These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.
- Ensure that this product is supplied power by a UL Listed Power Supply Unit marked "Class 2" or "LPS" or "PS2" and rated 12 Vdc, 2.3A or PoE (802.3bt) 0.64A min.
- The wired LAN hub providing power over the Ethernet (PoE) in accordance with IEEE 802.3bt shall be a UL Listed device with the output evaluated as a Limited Power Source as defined in UL60950-1 or PS2 as defined in UL62368-1.

- Keep out of direct sunlight and heat radiation sources. It may cause a fire.
- For the installation process, remove the dome cover from the camera. Connect the camera's dome to the camera base using the safety wire. Hook the safety wire to the screw at the base of the camera. Keep the inner and outer protective films on the dome during the installation to make sure no dust or smudges are left on the dome.
- Install the moisture absorber under the camera's network cable connector.
  - Remove the moisture absorber from the packaging.
  - Place the moisture absorber on the base of the camera, according to the diagram below.

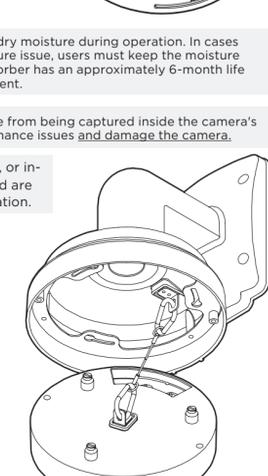

- Using the mounting template sheet for the mounting accessory, or the mounting accessory itself, mark and drill the necessary holes in the wall or ceiling. See the accessory's QSG for more information.

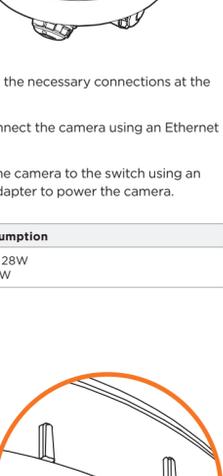


**NOTE:** The camera will generate enough heat to dry moisture during operation. In cases where the camera can experience a moisture issue, users must keep the moisture absorber in the camera. The moisture absorber has an approximately 6-month life cycle, varying depending on the environment.

**WARNING:** The moisture absorber prevents moisture from being captured inside the camera's housing, which may cause image performance issues and damage the camera.

**NOTE:** A wall mount, ceiling mount, junction box, or in-ceiling flush mount are sold separately and are required to complete the camera's installation.

- Secure the camera base to the mounting accessory using the second safety wire.

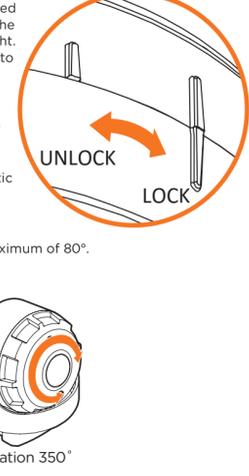

## STEP 2 – POWERING THE CAMERA


Pass the wires through the mounting accessory and make all the necessary connections at the base of the camera. See STEP 4.

- When using a PoE switch or PoE Injector, connect the camera using an Ethernet cable for both data and power.
- When not using a PoE switch or PoE Injector, connect the camera to the switch using an Ethernet cable for data transmission and use a power adapter to power the camera.


Power requirements	Power consumption
DC12V, PoE IEEE 802.3bt PoE+ class 5 (High power PoE injector included)	DC12V: max 28W PoE: max 31W

## STEP 3 – MOUNTING THE CAMERA

- Once all cables are connected, secure the camera base to the mounting accessory. Align the indented lines on the side of the camera with the lines on the mounting bracket as seen in the image on the right. Rotate the camera counter-clockwise to lock it into position.

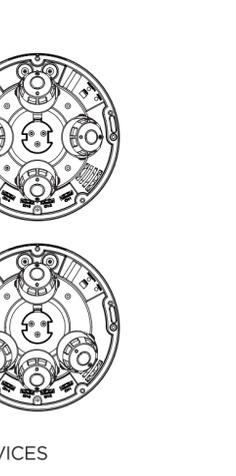


- Adjust the position of the camera modules on the magnetic base as needed. The camera modules can be moved between 1-5 positions for the ultimate coverage and view. Each camera is labeled with numbers 1-4 for the module's order. The modules snap into position using the magnetic track, allowing for maximum customization and fully adjustable views.
- Adjust the camera modules' angle and direction. Each camera can be rotated 350° and tilted a maximum of 80°.

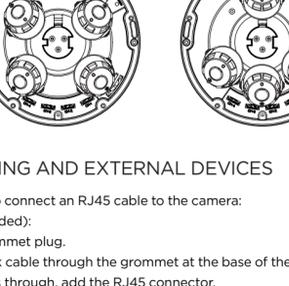


- Remove the protective film attached to each of the lens modules once they are in place.
- Remove the dome cover protective films from both inside and outside of the dome cover. Secure the dome cover to the camera's base using the included star wrench and dome screws to complete the installation.

**NOTE:** Only lens modules #3 and #4 can be seated in the center (5th) position. Trying to place lens modules #1 or #2 in the center may result in risk of pulling out or damaging the wire connector for the lens module.

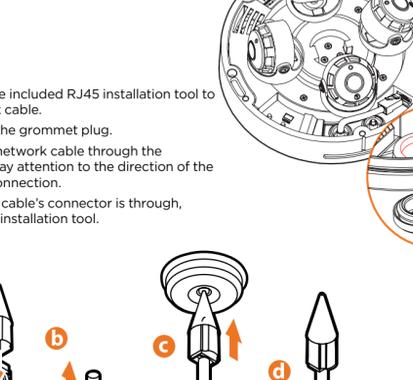


### Lens modules configuration options

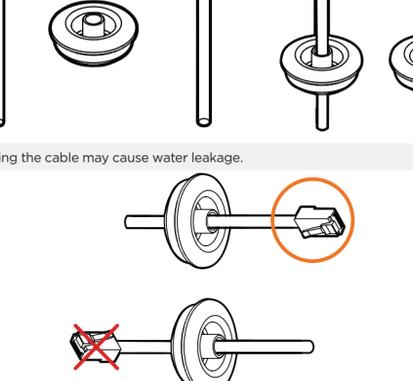


## STEP 4 – CABLING AND EXTERNAL DEVICES

- Network cable** - To connect an RJ45 cable to the camera:
  - Option A (Recommended):
    - Remove the grommet plug.
    - Pass the network cable through the grommet at the base of the camera.
    - Once the cable is through, add the RJ45 connector.

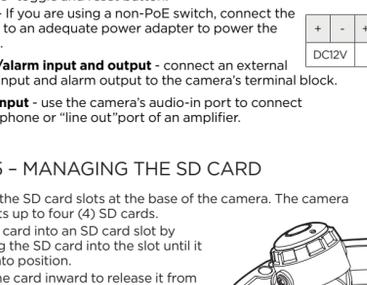

- Attach the included RJ45 installation tool to the network cable.
- Remove the grommet plug.
- Pass the network cable through the grommet connection. Pay attention to the direction of the grommet connection.
- Once the cable's connector is through, remove the installation tool.

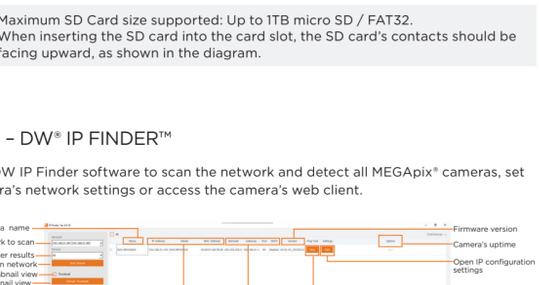

**NOTE:** Bending the cable may cause water leakage.



Once the network cable is passed through the grommet:

- Insert the grommet into the bottom of the camera base.
- Connect the RJ45 to the camera's network input in the camera.

**NOTE:** Use a cable with a diameter of ø0.19" - ø0.31" (ø5.0 - ø8.0mm). Depending on the installation environment, remove the rubber plug on the side of the camera's base and use the gap as a cable guide to prevent cables from getting caught between the camera and the mounting surface.


The camera's power, sensor and audio ports are on a terminal block, next to the "V-Change" toggle and reset button.

- Power** - If you are using a non-PoE switch, connect the camera to an adequate power adapter to power the camera.
- Sensor/alarm input and output** - connect an external sensor input and alarm output to the camera's terminal block.
- Audio input** - use the camera's audio-in port to connect a microphone or "line out" port of a speaker.

+	-	+	+	IN	COM	OUT
DC12V	DI	DO		AUDIO		

## STEP 5 – MANAGING THE SD CARD


- Locate the SD card slots at the base of the camera. The camera supports up to four (4) SD cards.
- Insert a card into an SD card slot using a card into the card slot until it clicks into position.
- Press the card inward to release it from the card slot.

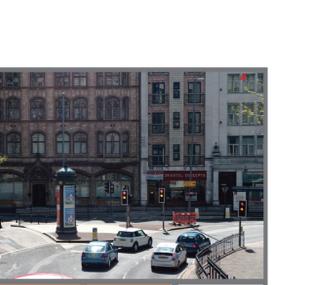


**NOTE:** Maximum SD Card size supported: Up to 1TB micro SD / FAT32. When inserting the SD card into the card slot, the SD card's contacts should be facing upward, as shown in the diagram.

## STEP 6 – DW® IP FINDER™

Use the DW IP Finder software to scan the network and detect all MEGApix® cameras, set the camera's network settings or access the camera's web client.

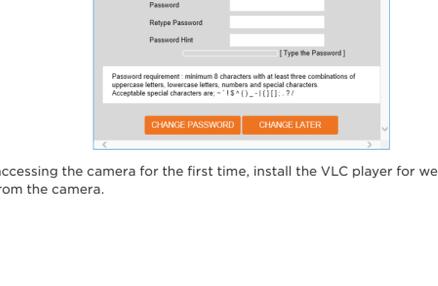

- To install the DW IP Finder, go to: <http://www.digital-watchdog.com>
- Enter "DW IP Finder" on the search box at the top of the page.
- Go to the "Software" tab on the DW IP Finder page to download and install the installation file.
- Open the DW IP Finder and click 'Scan Devices'. It will scan the selected network for all supported devices and list the results in the table. During the scan, the DW® logo will turn gray.
- When connecting to the camera for the first time, a password must be set.
  - Check the box next to the camera in the IP Finder's search results. You can select multiple cameras.
  - Click "Bulk Password Assign" on the left.
  - Enter admin/admin for the current username and password and password. Enter a new username and password to the right. Passwords must have a minimum of eight (8) characters and at least four (4) combinations of uppercase and lowercase letters, numbers and special characters. Passwords cannot contain the user ID.
  - Click "change" to apply all changes.

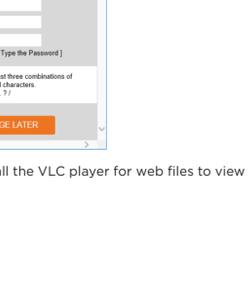

- Select a camera from the list by double-clicking on the camera's name or clicking on the "Click" button. The pop-up window will show the camera's current network settings. Admin users can adjust the settings as needed. The camera's network settings are set to DHCP by default.
- To access the camera's web page, click on the "Website" button.
- To save changes made to the camera's settings, enter the username and password of the camera's admin account and click 'Apply'.



**NOTE:** Select "DHCP" for the camera to automatically receive its IP address from the DHCP server. Select "Static" to manually enter the camera's IP address, (Sub)Netmask, Gateway and DNS information.

**NOTE:** The camera's IP must be set to static if connecting to Spectrui® IPVMS.

**NOTE:** Contact your network administrator for more information.

To access the camera from an external network, port forwarding must be set in your network's router.

## STEP 7 – WEB VIEWER



\*The GUI display may differ by camera models.

- Find the camera using the DW IP Finder.
- Double-click on the camera's view in the results table.
- Press the "View Camera Website".
- Enter the camera's username and password you setup in the DW IP Finder. If you did not setup a new username and password, a message will direct you to setup a new password for the camera to view the video.



- When accessing the camera for the first time, install the VLC player for web files to view video from the camera.

**NOTE:** Please see the full product manual for web viewer setup, functions and camera settings options.

**NOTE:** This products is covered by one or more claims of the HEVC Patents listed at [patentstat.cessi.advance.com](http://patentstat.cessi.advance.com).

