


Dimensions

Unit: Inch (mm)

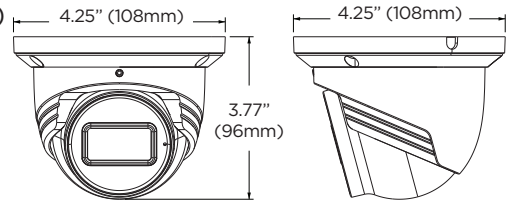

Summary

These MEGAPIX® IP cameras are NDA A compliant and deliver crystal-clear images at 4MP resolution and real-time 30fps. The IP67-rated turret camera features a 2.8mm fixed lens and a 360° camera gimbal for absolute view adjustment. Added intelligence includes line crossing, perimeter intrusion and video tampering detection. All MEGAPIX cameras are ONVIF conformant, assuring their successful integration with any open platform solution on the market.

Features


- 4MP 1/3" image sensor at real-time 30fps
- 2.8mm fixed lens
- True Wide Dynamic Range (WDR) for clear images in challenging light
- Simultaneous streaming and multiple codec options for smart bandwidth management
- 100' Smart IR™ with intelligent camera sync for clear B/W images with no need for external light
- Line crossing video analytics
- Perimeter intrusion video analytics
- Video tampering with scene-change detection video analytics
- Video tampering with video-blur detection video analytics
- Video tampering with abnormal color detection video analytics
- White and black housing options available
- Smart DNR™ 3D digital noise reduction reduces noise and ghosting for motion in low-light environments.
- Privacy zones cover sensitive areas in the camera's field of view.
- Backlight compensation (BLC)
- Two-way audio with a built-in microphone for direct communication between the monitoring station and the camera's location
- Local SD card slot for local recording in case of network loss
- Web server built-in for easy camera management from any browser
- PoE and DC12V for single cable simplified installation
- NDA A compliant for federal and government projects
- IP67- and IK10-rated camera housing built to last
- 5 year warranty

Specifications



IMAGE	
Image sensor	4MP 1/3" CMOS
Total pixels	2560 x 1440
Minimum scene illumination	0.005 lux (color) 0.0 lux (B/W)
S/N ratio	50dB
LENS	
Focal length	2.8mm, F1.6
Lens type	Fixed lens
Field of view (FoV)	94°
IR distance	100ft range
I/O	
Audio in / out	1 audio input and 1 microphone built-in
Audio compression	G.711A / U
Event Trigger	Motion alarm/sensor alarm
Pre-Post Recording	Pre: 1-5 sec., Post: 1-120 sec.
OPERATIONAL	
Shutter mode	Auto, manual
Shutter speed	1/2s - 1/100000s
Auto gain control	Auto
Day / night	Auto, day (color), night (B/W), schedule
3D DNR	Smart DNR™ 3D digital noise reduction
Wide dynamic range (WDR)	True WDR low, middle, high, 120dB
Privacy zone	8 programmable privacy masks
Video analytics	Line crossing, perimeter intrusion, video tampering detection (scene change, video blur, abnormal color detection)
Backlight compensation (BLC)	Yes
Mirror and flip	Yes
Alarm notifications	Notifications via email or FTP server
Memory slot	Micro SD / SDHC / SDXC card up to 256GB (card not included)
NETWORK	
LAN	802.3 compliance 10/100 LAN
Video compression type	H.265, H.264, MJPEG
Resolution	4MP, 3MP, 2.1MP/1080P, 720P, D1, 480x240, CIF (60Hz: 1 - 30fps; 50Hz: 1-25fps)
Frame rate	Up to 30fps at all resolutions
Video bitrate	64 Kbps - 8 Mbps
Bitrate control	Multi-streaming CBR/VBR at H.264/ H.265 (controllable frame rate and bandwidth)
Streaming capability	Dual-stream at different rates and resolutions. Maximum three (3) connections/streams at a time
IP	IPv4, IPv6
Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, PP-PoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Security	IP filtering, MAC filtering, authentication (ID/PW), SSL/TSL
ONVIF conformance	Yes
Web viewer	OS: Windows®, Mac® OS, Linux® Browser: Microsoft Edge, IE, Google Chrome, Mozilla Firefox
Video management software	DW Spectrum® IPVMS
ENVIRONMENTAL	
Operating temperature	-22°F - 140°F (-30°C - 60°C)
Operating humidity	0-95% RH (non-condensing)
IP rating	IP67-rated
IK rating	IK10 impact-resistant
Other certifications	FCC, CE, ROHS, ONVIF, NDA A
ELECTRICAL	
Power requirement	DC 12V, PoE IEEE 802.3af Class 2. (Adapter not included)
Power consumption	<5W
MECHANICAL	
Material	Metal turret housing
Housing color	DWC-VSTB04Bi: white DWC-VSTB04BiB: black
Dimensions	4.25" x 3.77" (108 x 96 mm)
Weight	1.01 lb (0.46 kg)
Warranty	5 year warranty

Mounting accessories (Optional)

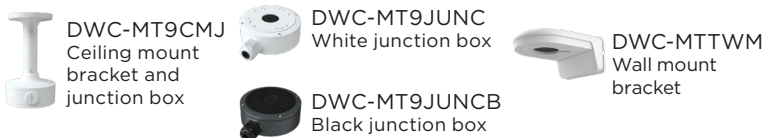

866.446.3595

sales@digital-watchdog.com

www.digital-watchdog.com

Built for Users.™

